


**Exhaust gas silencer
Reactive/Absorptive
with spark arrester
COM 25 SP**

Stock no. 00260

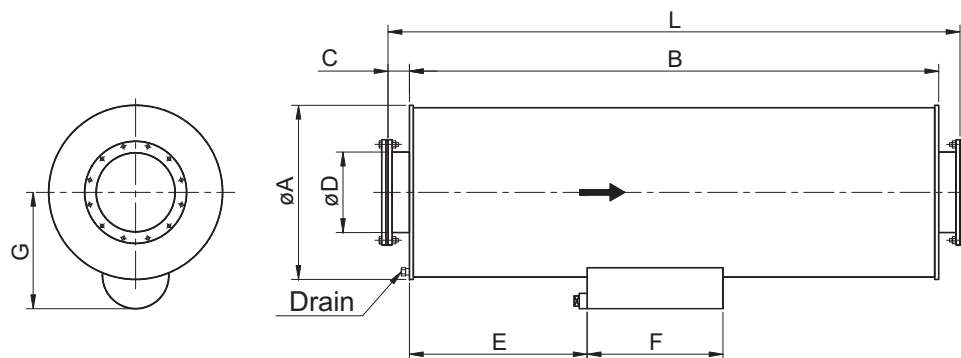

Stock No.	ND	øD [mm]	øA [mm]	B [mm]	L [mm]	C [mm]	E [mm]	F [mm]	G [mm]	Approx. Weight [kg]	Flange dimensions					
											Outer dia [mm]	Inner dia [mm]	PCD [mm]	Bolts NxMxL	T [mm]	Flange standard
00260-01-0065	65	76,1	285	850	1010	80	340	275	195	30	185	77	145	4-M16x40	10	DIN 2576
00260-01-0080	80	88,9	335	950	1110	80	380	275	220	38	200	90	160	8-M16x40	10	DIN 2576
00260-01-0100	100	114,3	365	1050	1210	80	420	275	235	48	220	115,5	180	8-M16x40	10	DIN 2576
00260-01-0125	125	139,7	415	1150	1310	80	460	275	260	75	250	141,5	210	8-M16x40	10	DIN 2576
00260-01-0150	150	168,3	470	1400	1560	80	650	275	285	102	285	170,5	240	8-M20x45	10	DIN 2576
00260-01-0175	175	193,7	520	1500	1660	80	600	365	335	125	315	196	270	8-M20x45	10	DIN 2576
00260-01-0200	200	219,1	620	1650	1850	100	660	430	415	176	340	221,5	295	8-M20x45	10	DIN 2576
00260-01-0250	250	273,0	670	2010	2210	100	800	430	455	225	375	276	335	12-M16x50	16	DIN 86044
00260-01-0300	300	323,9	770	2200	2400	100	850	430	505	285	440	327	395	12-M20x60	16	DIN 86044

Description:

Silencer is delivered with flanges, mating flanges, gaskets and bolts.

See also **technical information**

Material:

- S235JRG2

Surface treatment:

- Heat resistant paint

