

Flexible suspension Stainless steel


Stock no. 03000

Description:

- Housing: Complete in stainless steel
- Damping elements: CrNi
- Resonant frequency: 15-20 Hz
- Right/Left thread.

See also

Technical information

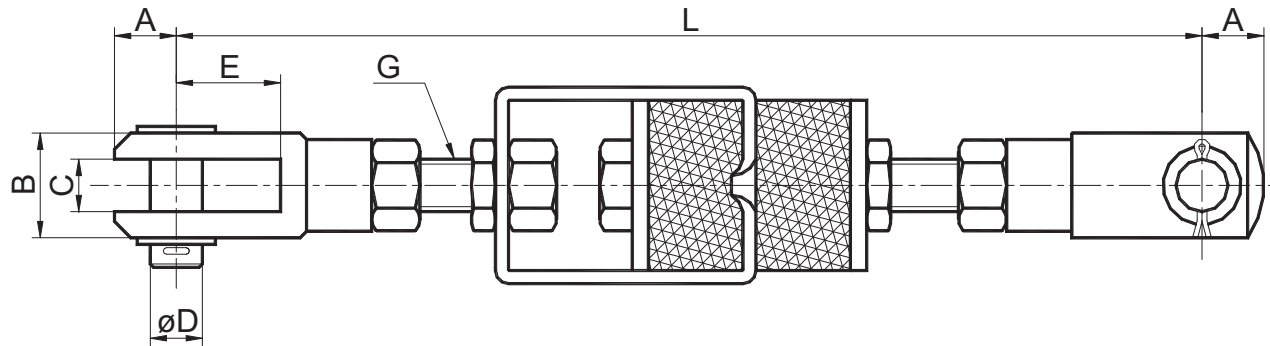

Dimensions:

Type no.	Stock No.	A	B	C	øD	E	L min.	L max.	G	Max. deflection	Static load	Max. dyn. load	Weight
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[daN]	[daN]	[kg]
SS-S3010	03000-06-0010	12	20	10	10	20	185	195	M 10	20	30 - 150	300	0,58
SS-S3012	03000-06-0012	14	24	12	12	24	250	275	M 12	25	40 - 200	400	0,77
SS-S3016	03000-06-0016	19	32	16	16	32	330	360	M 16	30	30 - 250	500	1,78
SS-S3020	03000-06-0020	26	40	20	20	40	345	380	M 20	30	100 - 500	1000	3,20